

RoHS




CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:50V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:100MΩMin.
- 6.Withstanding voltage:500V AC/minute
- 7.Material:PBT UL94V-0
- 8.Bill Of Part No.:
FU1002H-XP-X-HF

Pin: 2 3 4 . . .
Material Color
A : White
B : Black
C : Red
D : Orangr
E : Yellow
F : Green
. . .

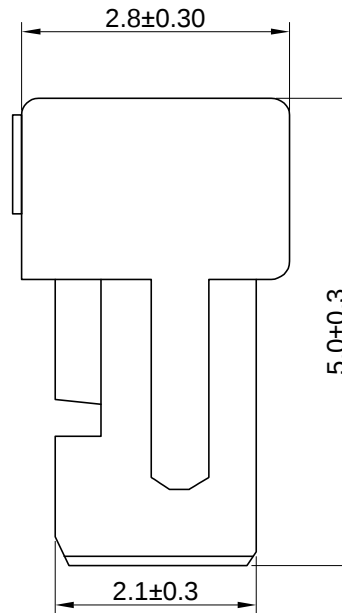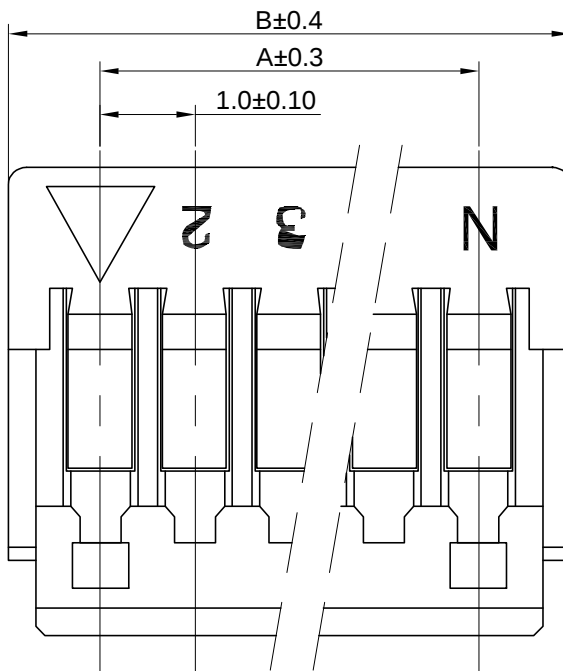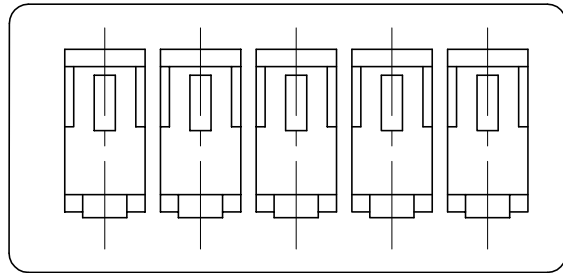


9.Ordering Information & Dimensions

PIN	DIM (mm)		PIN	DIM (mm)	
	A	B		A	B
2	1.0	3.0	12	11.0	13.0
3	2.0	4.0	13	12.0	14.0
4	3.0	5.0	14	13.0	15.0
5	4.0	6.0	15	14.0	16.0
6	5.0	7.0	16	15.0	17.0
7	6.0	8.0	17	16.0	18.0
8	7.0	9.0	18	17.0	19.0
9	8.0	10.0	19	18.0	20.0
10	9.0	11.0	20	19.0	21.0
11	10.0	12.0			

TOLERANCE

X. X.XXX ±0.1
X.X ±0.30
X.XX ±0.20 Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU1002H-XP-X-HF

DRAWING NO.

C-FU1002H-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE 10F1

SCALE 10: 1

REV.

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE. 1.00mm Pitch Wire To
Board Housing

8		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:50V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:100MΩMin.
- 6.Withstanding voltage:500V AC/minute
- 7.Material:PBT UL94V-0
- 8.Bill Of Part No.:

FU1002H-AXP-X-HF


Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.

9.Ordering Information & Dimensions

PIN	DIM (mm)		PIN	DIM (mm)	
	A	B		A	B
2	1.0	5.0	12	11.0	15.0
3	2.0	6.0	13	12.0	16.0
4	3.0	7.0	14	13.0	17.0
5	4.0	8.0	15	14.0	18.0
6	5.0	9.0	16	15.0	19.0
7	6.0	10.0	17	16.0	20.0
8	7.0	11.0	18	17.0	21.0
9	8.0	12.0	19	18.0	22.0
10	9.0	13.0	20	19.0	23.0
11	10.0	14.0			

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU1002H-AXP-X-HF

DRAWING NO.

C-FU1002H-AXP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
10: 1

REV.

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE. 1.00mm Pitch Wire To
Board Housing

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:50V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:100MΩMin.
- 6.Withstanding voltage:500V AC/minute
- 7.Material:PBT UL94V-0
- 8.Bill Of Part No.:

FU1002H-2xXP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.

9.Ordering Information & Dimensions

PIN	DIM (mm)		
	A	B	C
12	5.0	7.2	9.0
16	7.0	9.2	11.0
20	9.0	11.2	13.0
30	14.0	16.2	18.0
40	19.0	21.2	23.0
50	24.0	26.2	28.0

TOLERANCE		PART NO.	东莞市福朗连接器制造有限公司 DongGuan FuLang Connector Manufacturing Co., LTD		
X.	X.XXX ±0.1	FU1002H-2xXP-X-HF			
X.X	±0.30	DRAWING NO. C-FU1002H-2xXP-X-HF	TITLE. 1.00mm Pitch Wire To Board Housing (Dual Row)		
X.XX	±0.20				
	UNIT: mm	APPROVED BY	CHECKED BY	DRAWN BY	PAGE 1 OF 1
		DWG TYPE. Customer Drawing		SCALE 5: 1	REV. A

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE