

RoHS




CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA


Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:150V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:30mΩMax.
- 5.Insulation resistance:500MΩMin.
- 6.Withstanding voltage:500V AC/minute
- 7.Spec. PLS. Refer To PS-FU1252


0.15±0.01

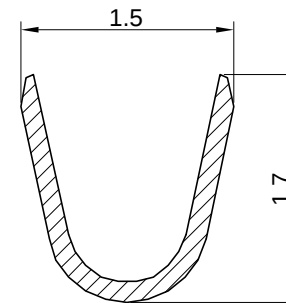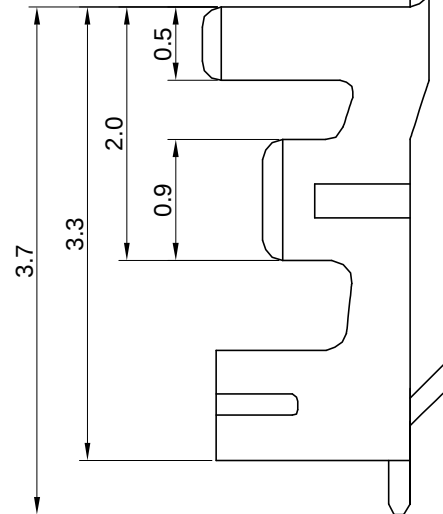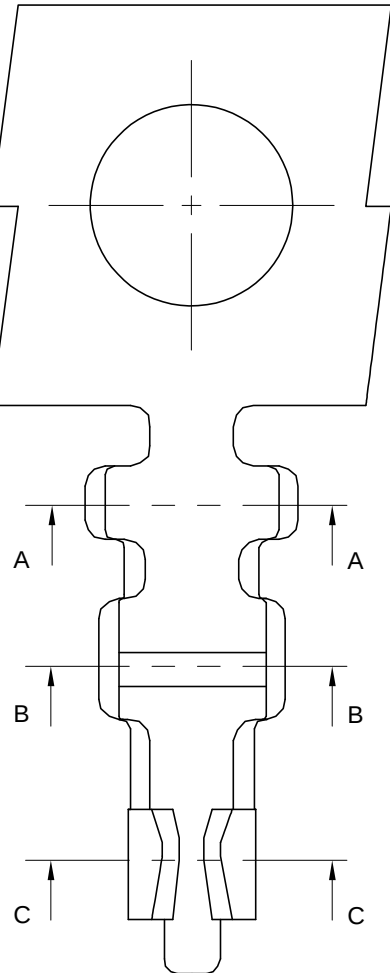

SEC A-A



SEC B-B

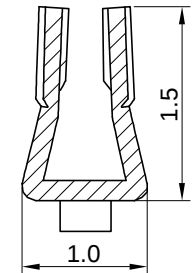


SEC C-C

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU1252-T0P-B1	AWG#26~#30	1.0mm Max	Phosphor Bronze	Tin over Nickel	10000Pcs
FU1252-T0P-B2	AWG#26~#30	1.0mm Max	Phosphor Bronze	Au over Nickel	10000Pcs

TOLERANCE

X.	X.XXX ±0.10
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU1252-T0P-XX

DRAWING NO.

C-FU1252-T0P-XX

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
1: 1

REV.

A

东莞市福朗连接器制造有限公司
DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD

TITLE. 1.25mm PITCH CRIMP TERMINAL

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.06.02

6 QMI-P12-05-05