

RoHS




CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:2A AC,DC
- 2.Voltage rating:100V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:800V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:
FU2007H-XP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.

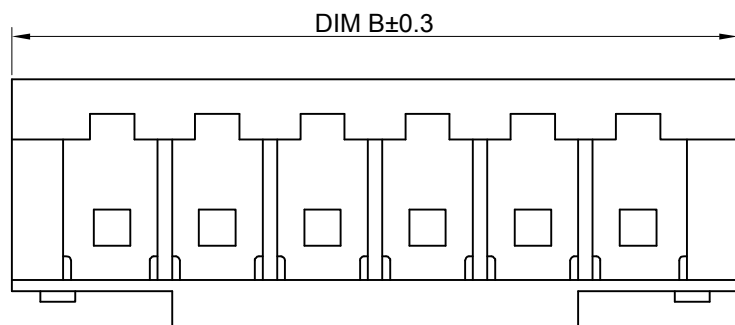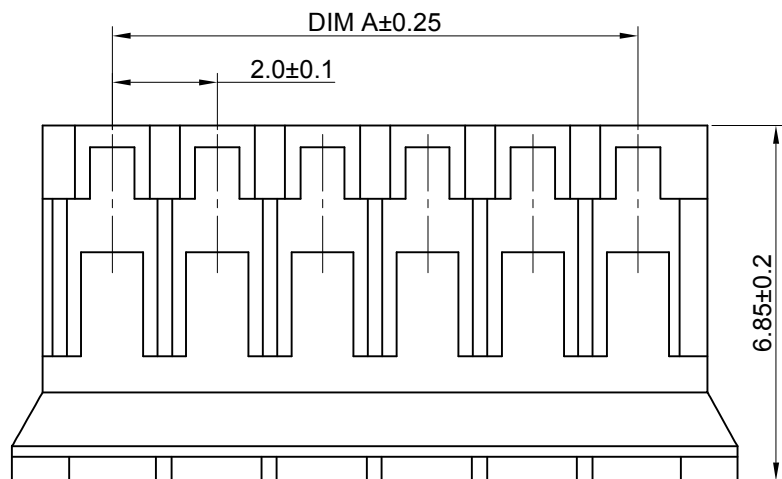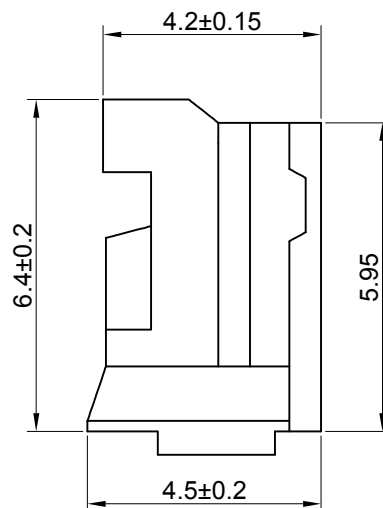

9.Ordering Information & Dimensions

			16.00	19.80	9
30.00	33.80	16	14.00	17.80	8
28.00	31.80	15	12.00	15.80	7
26.00	29.80	14	10.00	13.80	6
24.00	27.80	13	8.00	11.80	5
22.00	25.80	12	6.00	9.80	4
20.00	23.80	11	4.00	7.80	3
18.00	21.80	10	2.00	5.80	2
A	B	PIN	A	B	PIN

TOLERANCE		PART NO.		东莞市福朗连接器制造有限公司					
X. X.XXX ±0.1		FU2007H-XP-X-HF		DongGuan FuLang Connector Manufacturing Co., LTD					
X.X ±0.30		DRAWING NO.		TITLE.					
X.XX ±0.20 Angular ±2°		C-FU2007H-XP-X-HF		2.00mm Pitch Wire To Board Housing					
		UNIT:	APPROVED BY		CHECKED BY	DRAWN BY	PAGE	REV.	
mm								10F1	A
DWG TYPE.								SCALE	
Customer Drawing								5: 1	

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE