




RoHS

CUST INFORMATION.


PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:5A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1500V AC/minute
- 7.Spec. PLS. Refer To PS-FU3001/3002

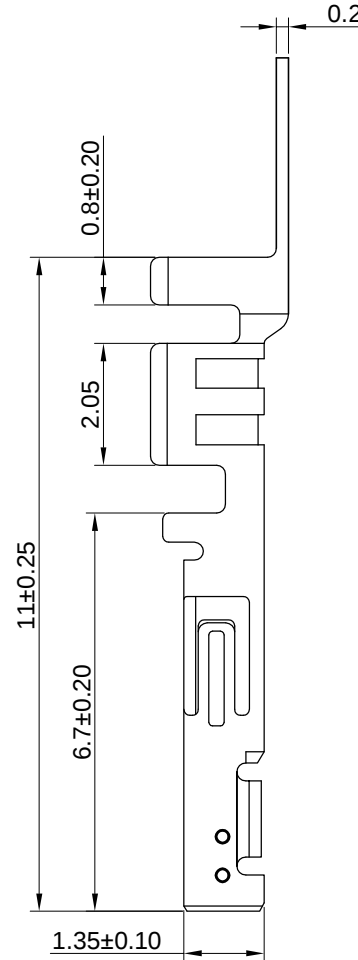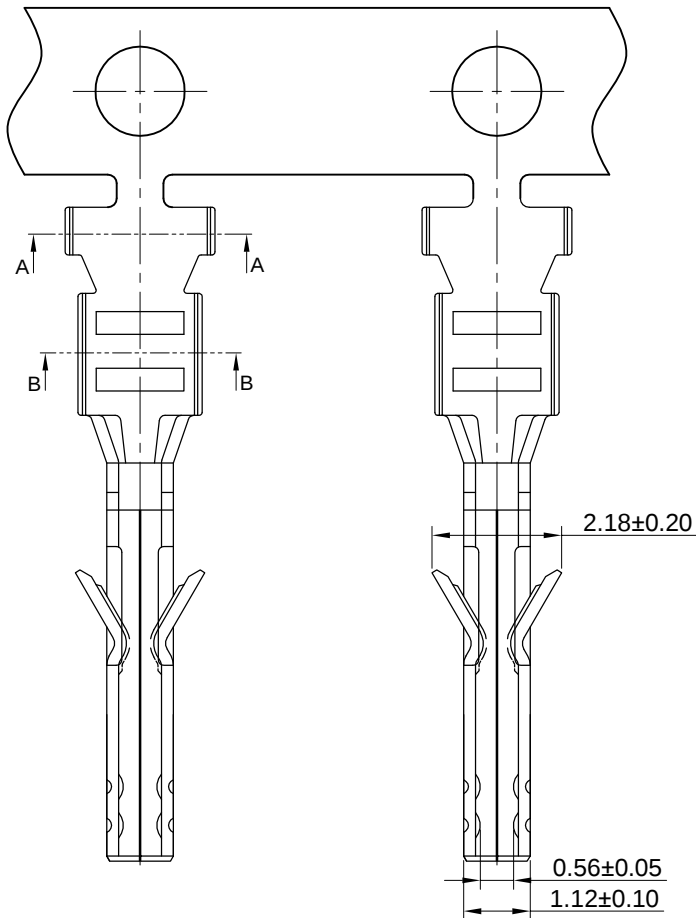


SEC:A-A



SEC:B-B

Part No.	A	B	C	D
FU3001-T0P-B1	2.54	2.30	2.08	1.90
FU3001-T1P-B1	2.10	1.90	1.65	1.46

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU3001-T0P-B1	AWG#26~#30	1.27mm Max	Phosphor Bronze	Tin over Nickel	10000Pcs
FU3001-T1P-B1	AWG#20~#24	1.85mm Max	Phosphor Bronze	Tin over Nickel	10000Pcs

TOLERANCE		PART NO.		东莞市福朗连接器制造有限公司 DongGuan FuLang Connector Manufacturing Co., LTD		
X.	X.XXX ±0.1	FU3001-TXP-B1				
X.X ±0.30		DRAWING NO.		TITLE.		
X.XX ±0.20	Angular ±2°	C-FU3001-TXP-B1				
				3.00mm Crimp Style Connectors		
UNIT:		APPROVED BY	CHECKED BY	DRAWN BY	PAGE	REV.
mm					10F1	
DWG TYPE.					SCALE	
Customer Drawing					10:1	A

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.12.20