

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:




- 1.Current rating:1A AC,DC
- 2.Voltage rating:600V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1800V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU4001H-AXP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.


9.Ordering Information & Dimensions

PIN	DIM(mm)	
	A	B
2	4.00	9.8
3	8.00	13.8
4	12.00	17.8
5	16.00	21.8

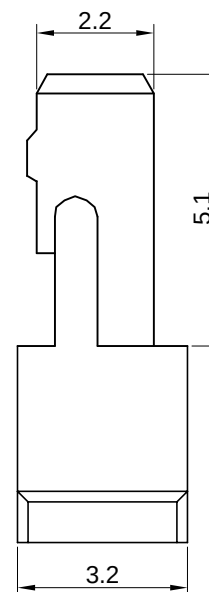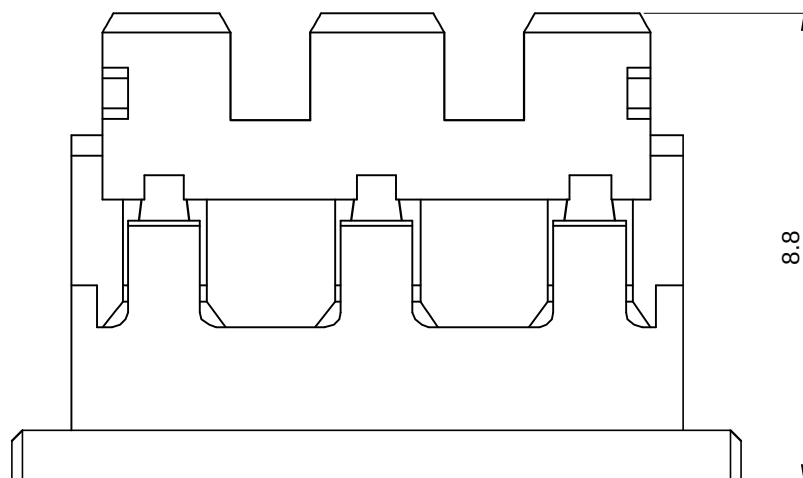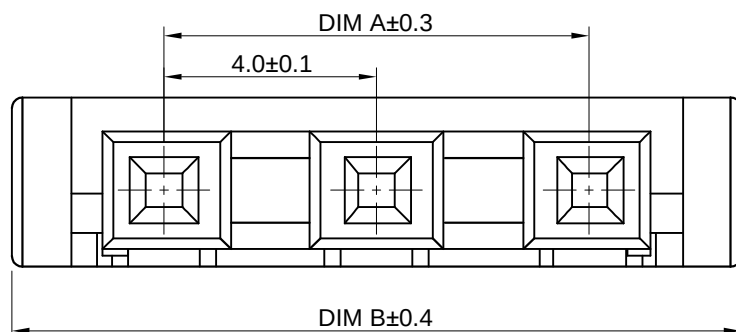

TOLERANCE

X.	X.XXX ±0.10
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU4001H-AXP-X-HF

DRAWING NO.

C-FU4001H-AXP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
1: 1

REV.

A

东莞市福朗连接器制造有限公司

DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD

TITLE. 4.0mm Pitch Wire To
Board Housing

A		For New Drawing	GuobaoLi	2017.12.24
REV.	ECN NO	REVISION RECORD	DRAW	DATE

6 QMI-P12-05-05

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:600V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1800V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:
FU4001H-XP-X-HF


Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green

9.Ordering Information & Dimensions

PIN	DIM(mm)	
	A	B
2	4.00	9.8
3	8.00	13.8
4	12.00	17.8
5	16.00	21.8

TOLERANCE

X.	X.XXX ±0.10
X.X±0.30	
X.XX±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU4001H-XP-X-HF

DRAWING NO.

C-FU4001H-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1OF1

SCALE
1: 1




REV.

A

东莞市福朗连接器制造有限公司
DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD

TITLE. 4.0mm Pitch Wire To
Board Housing

A		For New Drawing	GuobaoLi	2017.12.24
REV.	ECN NO	REVISION RECORD	DRAW	DATE

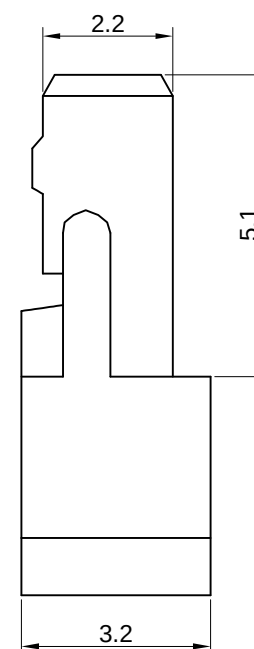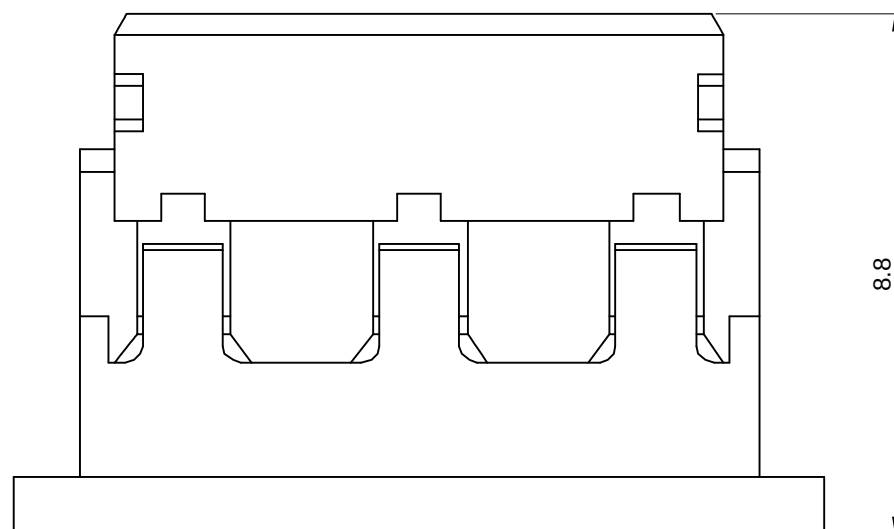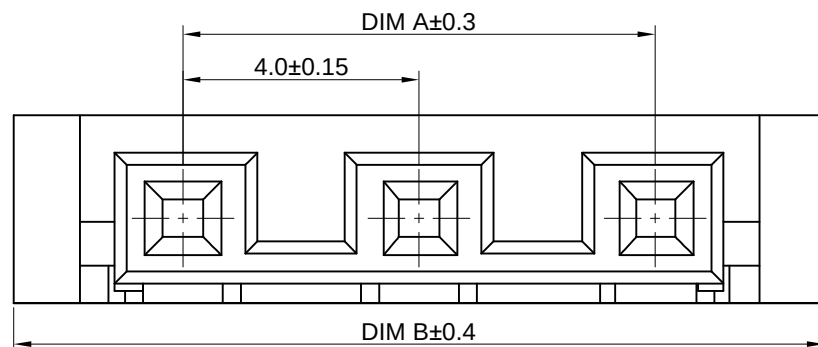

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:600V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1800V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU4001HK-AXP-X-HF


Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.

9.Ordering Information & Dimensions

PIN	DIM(mm)	
	A	B
2	4.00	9.8
3	8.00	13.8
4	12.00	17.8
5	16.00	21.8

TOLERANCE

X.	X.XXX ±0.10
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU4001HK-XP-X-HF

DRAWING NO.

C-FU4001HK-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
1: 1

REV.

A

东莞市福朗连接器制造有限公司

DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD

TITLE. 4.0mm Pitch Wire To
Board Housing

A		For New Drawing	GuobaoLi	2017.12.24
REV.	ECN NO	REVISION RECORD	DRAW	DATE

6 QMI-P12-05-05